

QUIET CUBE SPECIFICATIONS

• SKID MOUNTED

4" X 8" rectangular tube frame, fork pockets, and certified lifting cage.

• POWER SOURCE

150 HP electric motor, 460 volt, 3-phase, hostile duty (Full Load amps 163, no load 48.8)

• SOUND ATTENUATION PACKAGE

Dual inlet and discharge silencers with sound attenuation enclosure.

• VACUUM AIR FLOW (blower)

Roots Dresser 2350 CFM capable of 27" Hg, 5 belt driven, with guard

• FILTRATION SYSTEM

Cyclonic separation. Baghouse - 37 Teflon coated, quick change filter bags with continuous reverse pulse air cleaning. High efficiency blower safety filter.

• INSTRUMENT PANEL (NEMA 4)

Soft start package, push button on/off switch with indicator light, disconnect lever, air pulse on/off switch, material dump on/off switch.

STANDARD EQUIPMENT

- Paint-one color (custom lettering available)
- Wet or dry operation
- Automatic cone vibrator
- Emergency stop button
- 10" inspection manhole

OPTIONS



- Slide gate discharge
- 16" manhole on baghouse
- Auger in hopper (cone)
- Hydraulics (lift cylinder)
- HEPA filtration
- Tool box
- Air compressor - 120 PSI
- Trailer mounted to DOT standards



Dimensional Drawing On Reverse Side



Industrial Vacuum Equipment Corporation
N8091 Maple Street • Ixonia, WI 53036
800-331-4832 • 920-261-1136 • FAX 920-261-7117
www.industrialvacuum.com

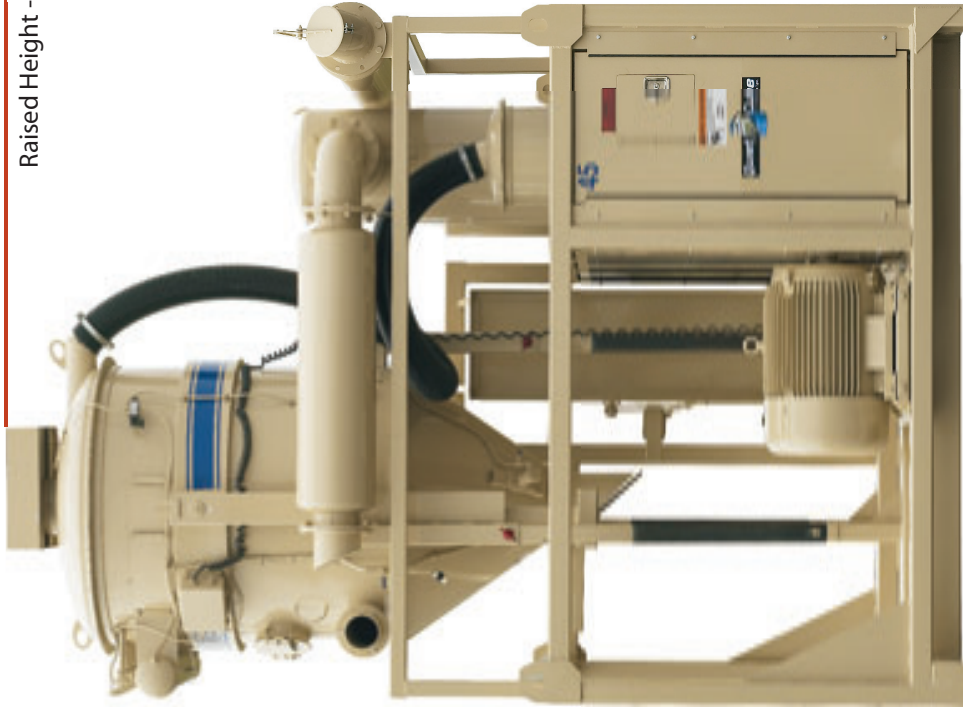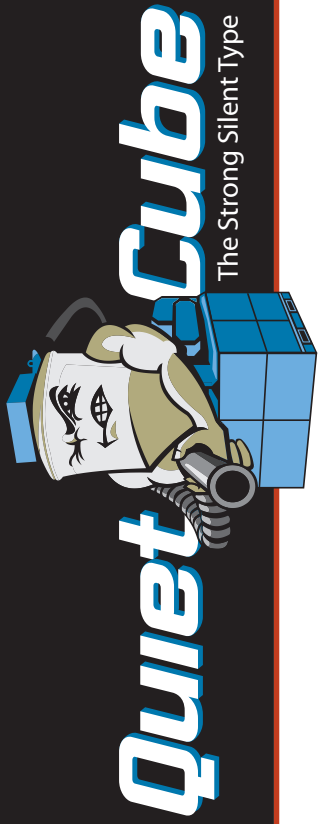

Raised Height - 183"

Length - 126"

Weight - 9500 lbs.



Stowed Height - 126"

Width - 100"