



60kW PORTABLE HEATER

Electric Powered Duct Heater with Blower

•AIR VOLUME / HEAT

3,000 to 4500 CFM, 76-78 dBA, 204,780 BTU
 Heat Stage 1: 102,390 BTU, 38 degrees F temp rise
 Heat Stage 2: 204,780 BTU, 48 degrees F temp rise

•POWER SOURCE

72 amps, 460 Volt, 3 Phase, 60 Hz NEMA 4 enclosure



Dimensional drawing on other side



STANDARD EQUIPMENT

- 204,780 BTU, 460 volt, 3 phase, 60 hz, 72 amps
- NEMA 4 enclosure, disconnect switch, 24 volt controls
- Cam-lock electrical panel connections, E-1016 series
- 3 HP rated VFD motor control, automatic multi-speed settings
- Carbon steel base with fork pockets, lifting cage, stackable
- Ducting box w/ access cover, fin & tube heating elements
- Pleated intake filter, 22" x 22" x 2", MERV 9
- (1) 20" dia. QF inlet hose connection, clamp and hose adapter
- (1) 20" dia. QF outlet hose connection, clamp and hose adapter
- (2) Stages of heat with switches and LED indicator light
- Air flow switch with LED indicator light
- Automatic thermal shutdown, 250 degrees F
- Insulated foil face compartment, 1" thick
- Standard one year limited warranty
- High quality finish- epoxy primer & polyurethane top coat

VERSATILITY - OPTIONS

- Prewired power cable (specify length)
- NEMA 4 Stainless Steel Enclosure
- Stainless Steel Construction
- Wired 208-230 volt, 3 phase, 144 amps
- Remote thermostat probe w/ temp display
- Remote thermostat interface 2-10VDC
- Remote thermostat interface 4-20 mA
- Slip-on duct hose connections (specify dia.)
- Ducting and hose accessories



VACTAGON LLC
 N7959 Birch Road • Ixonia, WI 53036
 800-569-6542 • 920-261-1136 • FAX 920-261-7117
www.industrialvacuum.com

60kW PORTABLE HEATER

Electric Powered Duct Heater with Blower


Vactagon LLC manufactures portable duct heater systems. Ranging from 7kW - 150kW, Contact us for more information



DIMENSIONS

Weight 900 lbs.

Side view

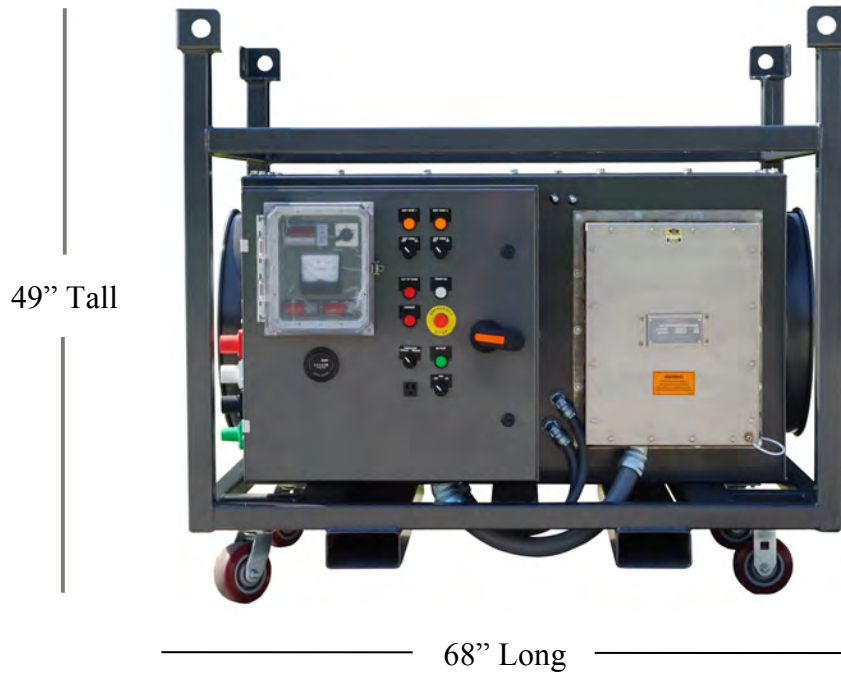

Rear view

