


HURRICANE 400_{EM}

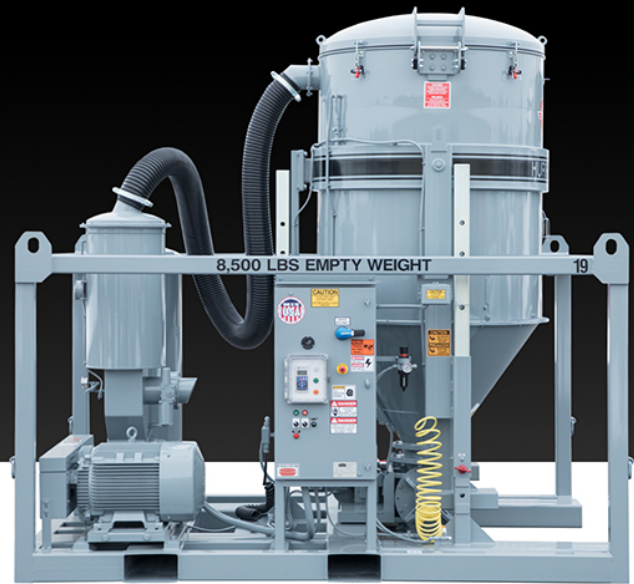

Dimensional drawing on other side

HURRICANE 400_{EM} SPECIFICATIONS

- **SKID MOUNTED**
4" x 8" rectangular tube frame, fork pockets & certified lifting cage
- **POWER SOURCE**
75 HP electric motor, 460 volt, 3 phase hostile duty motor (full load amps 96)
- **SOUND ATTENUATION PACKAGE**
1 blower discharge silencer & 1 inlet blower silencer
- **VACUUM AIR FLOW (Blower)**
Roots Dresser 412 DVJ, 1332 CFM capable of 27" Hg, 5 belt driven with OSHA approved guard



*Shown with Rotary Discharge option

- **FILTRATION SYSTEM - 3 STAGE**
Cyclonic separation. Baghouse - 37 Teflon coated quick change filter bags with continuous reverse pulse air cleaning. High-efficiency blower safety filter
- **INSTRUMENT PANEL (NEMA 4)**
Soft start package, push-button on/off switch with indicator light, disconnect lever, filter cleaning on/off switch, material dump on/off switch

STANDARD EQUIPMENT

- Paint - one color (custom lettering available)
- Wet or dry operation
- Automatic cone vibrator
- Emergency stop button with 50' cord

OPTIONS

- Rotary discharge valve
- Double dump discharge valve
- 16" manhole on baghouse
- Auger in hopper (cone)
- Hydraulics (lift cylinder)
- HEPA filtration
- Tool box
- Air compressor - 120 PSI
- Trailer mounted to DOT standards



INDUSTRIAL VACUUM EQUIPMENT CORPORATION
N8150 Maple St. • Ixonia, WI 53036
800-331-4832
www.IndustrialVacuum.com



HURRICANE 400EM



DIMENSIONS

WIDTH 96"

WEIGHT 8,500 lbs

