

# HURRICANE 600



*Dimensional drawing on other side*

## SPECIFICATIONS

- **TRAILER MOUNTED** Chassis - tandem 7,000# axles  
4" x 6" rectangular tube frame, with four 8-lug 235/85/R16, 14PR  
DOT lighting with electric brakes, NATM certified
- **POWER SOURCE** John Deere Tier 4 turbo-charged diesel engine, 4 cylinder, 4.5 liter, 173 HP @ 2,400 RPM
- **P.T.O. (clutch)** Heavy duty NACD 11.5" clutch
- **VACUUM AIR FLOW (blower)** Positive displacement, 3660 CFM capable of 16" Hg, 5 belt driven with guard  
(Roots 624 DVJ or equal)
- **FILTRATION SYSTEM (3-Stage)**
  - Stage 1: Cyclonic separation
  - Stage 2: Baghouse/37 Teflon coated, quick change filter bags with air cannon providing continuous reverse pulse filter cleaning
  - Stage 3: Horizontal mounted high efficiency blower safety filter, tool-less filter changeout
- **HYDRAULICS** 4.5 GPM, 2200 PSI, direct drive
- **ENCLOSURE** Lockable steel shroud over engine
- **INSTRUMENT PANEL (Fully enclosed)** 12 volt key start, safety system (low oil pressure/high water temperature auto shutdown), oil pressure, water temperature, ammeter, tachometer with hour meter, filter cleaning on/off switch, material vacuum & dump time controls
- **AIR COMPRESSOR** Direct drive Bendix twin cylinder; water cooled & oil pressure fed. Haldex air dryer with electronic heater. AMSE certified air tank mounted on vibration isolators (provides air to pneumatic controls and self cleaning filter system)

## STANDARD EQUIPMENT

- Paint - one color (custom lettering available)
- Wet or dry operation
- Tool box
- Automatic cone vibrator
- 100 gallon fuel tank
- Adjustable height pintle hook
- Emergency stop button pendant
- 10" inspection door (hopper)
- Hydraulic lift leg to level trailer
- Spare tire & carrier
- Tool-less flip top lid on baghouse

## OPTIONS

- Cold weather package
- HEPA filtration
- Auxiliary 50 gallon fuel tank
- 16" manhole on baghouse
- Asbestos/hazardous waste package
- Auger in cone
- Auxiliary air hose 120 PSI
- Skid mount
- 150 HP electric motor
- 4 point certified lifting cage
- High reach package
- Gas shock flip top lid on baghouse
- Continuous vacuum discharge valve

## SAFETY FEATURES

- OSHA approved belt guard
- Remote pendant emergency stop button
- Safety struts for baghouse
- Emergency breakaway chains
- Wheel chocks
- Optional HEPA filtration
- Electric brakes
- Low oil or high temp engine shutdown



INDUSTRIAL VACUUM EQUIPMENT CORPORATION  
N8150 Maple Street • Ixonia, WI 53036  
800-331-4832 • 920-261-1136 • FAX 920-261-7117  
[www.IndustrialVacuum.com](http://www.IndustrialVacuum.com)



# HURRICANE 600


## DIMENSIONS

WIDTH 100"

WEIGHT 10,800 lbs



Length when Lowered 214"

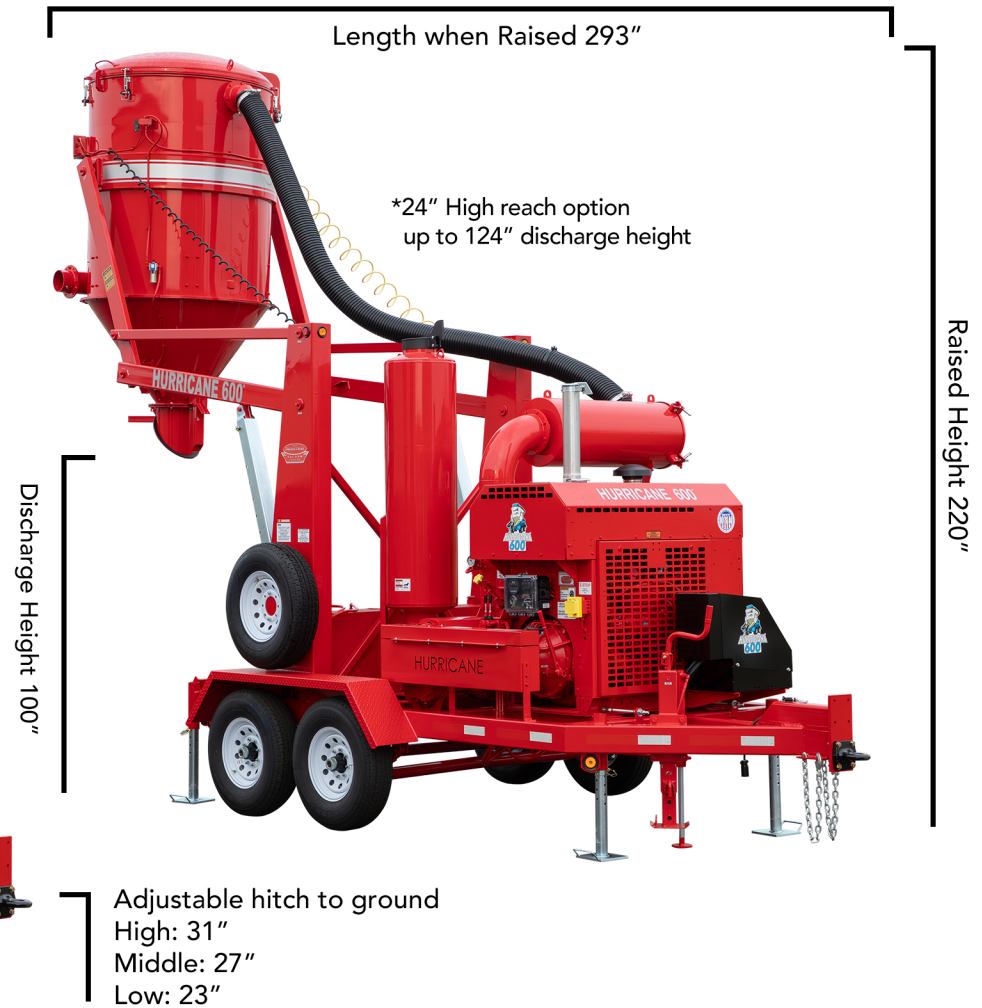

Length when Raised 293"

\*24" High reach option  
up to 124" discharge height

Discharge Height 100"

Raised Height 220"

Adjustable hitch to ground  
High: 31"  
Middle: 27"  
Low: 23"